

## **RELEASE AGENT #10E**

FORM RELEASE AGENT



## **Benefits**


- Architectural Concrete Finish: Ideal for producing clean, uniform surfaces with minimal voids
- Fast Drying and Non-Slip: Dries quickly and reduces slipperiness on horizontal surfaces, such as HDO or PSF
- Form Liners: Safe for use on form liners like Urethane, Styrene and ABS that can't handle solvent or petroleum-based release agents
- Cost-Effective: High coverage rates with low application costs
- Easy-to-Apply: Can be applied with a low-pressure sprayer
- Clean Release: Provides a crisp, positive release
- Excellent Resistance to Rain: Once product is dry, it has excellent resistance to dew and rain showers and will not re-emulsify
- Inherently Biodegradable: Green Engineered<sup>®</sup> Safe for health and the environment



FOLLOW US

Tuhe

nox-crete.com • 402-341-2080

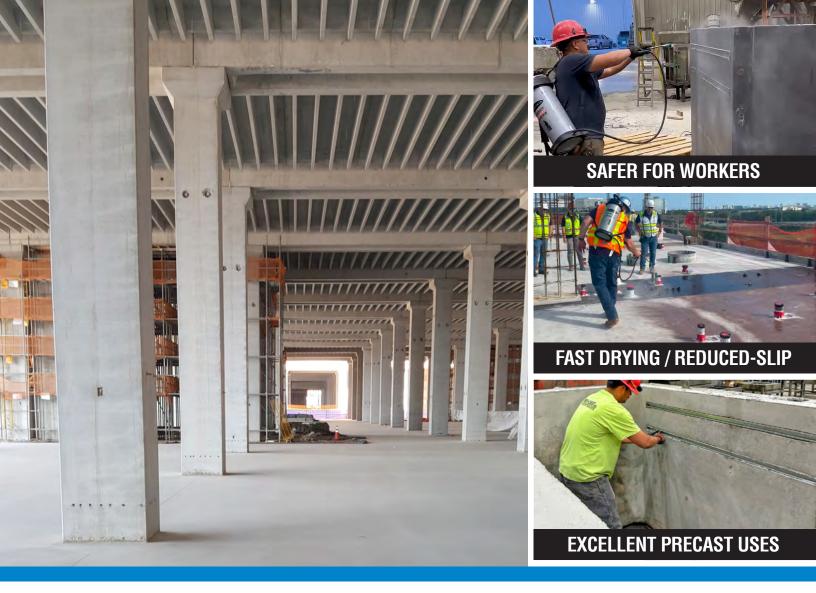

Release Agent #10 E is a revolutionary water-based form release agent designed for use on dense, non-absorptive form surfaces. Its low-viscosity, chemically active formulation allows for application at very light coverage rates, reducing overall costs.

## **APPLICATIONS**

- · Easily applied with common construction sprayers
- Suitable for precast and commercial forming operations
- Ideal For Use On: Non-absorptive form surfaces such as steel, plastic, fiberglass, HDO, and PSF plywood
- Coverage rates on non-absorptive form surfaces range from 2,000 to 3,000 sf/gal (50 -75 sm /L)
- Coverage rates on MDO plywood surfaces range from 800 to 1,200 sf / gal. (20 30 sm / L)
- VOC-compliant to satisfy the air quality regulations for any project in the United States or Canada



- 275 gallon (1,040 L) totes
- 55 gallon (208 L) drums
- 5 gallon (19 L) pails





nox-crete.com • 402-341-2080