


# PRODUCT DATA

## RES-CURE DH 100

Amber-colored, water-based dissipating hydrocarbon resin-type concrete curing compound.

VOLATILE ORGANIC COMPOUND (VOC)  
REGULATORY COMPLIANCE

RES-CURE DH 100

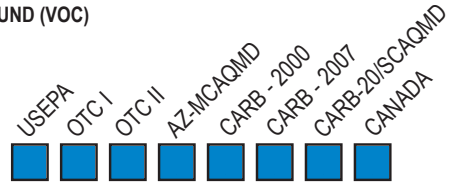

### HOW IT WORKS

Applied to the surface of freshly placed concrete, RES-CURE DH quickly forms a moisture vapor-resistant membrane, preventing rapid evaporation of concrete mixing water necessary for proper concrete cure and strength development.

### APPLICATIONS

- ◆ Use on horizontal concrete surfaces following final finishing.

### ADVANTAGES

- ◆ Available in 10% solids.
- ◆ Promotes retention of original mixing water during the early curing stages, allowing concrete to develop maximum strength, density and surface hardness.
- ◆ Minimizes concrete surface crazing and cracking from excessive moisture loss, especially during hot and/or windy weather.
- ◆ Provides temporary resistance to rain shower damage and penetration of dirt, oil, grease, tire marks, etc. that can stain concrete during construction, reducing final cleanup costs.
- ◆ Prevents adhesion of mortar and concrete splash during construction, aiding cleanup.
- ◆ Does not contain any waxes, paraffins, gums, or oils.
- ◆ Typically dries to a dust- and tack-free state in 30 minutes.
- ◆ Typically dissipates within 30 - 90 days. (See PRECAUTIONS)
- ◆ Complies with ASTM C 309, Type 1, Class A & B and AASHTO M 148, Type 1, Class B. Contact Nox-Crete for more details. Compliant with USDA requirements for incidental food contact.
- ◆ Green Engineered®—better for health and the environment.

### ⚠ PRECAUTIONS ⚠

- ◆ Do not use on architectural concrete or where cured concrete surface color appearance is critical.
- ◆ Do not use where treated surfaces are to be covered with concrete or plaster.
- ◆ Do not use with other floor sealers, treatments, bondbreakers, sealants, adhesives, resilient tile floor coverings, concrete paints, etc. that may contact surfaces treated with RES-CURE DH without prior site test to determine compatibility.
- ◆ Exposure to ultraviolet light will cause RES-CURE DH to turn yellow in color, which may be objectionable in appearance.
- ◆ Treated surfaces may be slippery prior to drying and after drying when wet with water or liquids.

- ◆ Numerous factors, including sunlight exposure, product application rate, and alkalinity conditions, can either positively or negatively affect the oxidation or rate of dissipation of RES-CURE DH.
- ◆ Complete removal of unoxidized or partially oxidized RES-CURE DH films may require the use of solvent-based strippers, sandblasting, or other mechanical means.
- ◆ Protect from freezing. If allowed to freeze, product packaging may rupture and the emulsion stability of this product may be affected, making it difficult to keep product mixed during application. Product that is suspected of freezing should not be used.
- ◆ Verify that product is within "USE BY" date stated on product packaging. Do not use expired product. Use of expired product may result in poor product performance or failure.
- ◆ Not recommended for application when the air temperature is less than 40° F (4° C).

### USE INSTRUCTIONS

- ◆ Request current product literature, labels and safety data sheets from manufacturer and read thoroughly before product use.
- ◆ Site environmental conditions, substrate conditions, and concrete mix design have a major effect on product selection, application methods, procedures and rates, appearance, and performance. Product literature provides general information applicable to some conditions. However, an adequate production test application by the purchaser or installer before field scale use is mandatory (irrespective of any other verbal or written representations) to verify that product and quantities purchased can be satisfactorily applied and will achieve desired appearance and performance under intended use conditions.
- ◆ RES-CURE DH is shipped ready to use. Do not dilute. Mix well before using, avoiding incorporating air into product.
- ◆ Typical application rate varies with substrate conditions and range from 50-500 sf / gal (1.25 sm / L to 12.5 sm / L).
- ◆ Can be applied with brushes or rollers, but best results are achieved using lambwool applicators or low-pressure sprayers. Hand pump compression sprayers like Nox-Crete's PERFECT SPRAYER provide good results for smaller areas. Large areas can be most economically treated with power sprayers. (NOTE: Product is incompatible with many organic solvents and/or thinners that may be present as residue in sprayer interiors, hoses or pressure lines. Flush with warm detergent solution before applying RES-CURE DH).
- ◆ Allow complete surface bleed water evaporation before application to prevent lack of membrane adhesion and poor curing performance.
- ◆ Apply at substrate temperatures over 55° F (13° C). Product can be applied at lower substrate temperatures above freezing but extended product cure time is required. Do not apply at

Cures / Cure & Seal Compounds

nox-crete®

chemical solutions to concrete problems

www.nox-crete.com



air or substrate temperatures at or below freezing or when such temperatures are expected within 6 hours following application.

- ◆ Apply uniformly to point of saturation and appearance of continuous surface film IMMEDIATELY following final finishing and after disappearance of surface water sheen. Concrete should be damp but not wet on the surface.
- ◆ Apply to vertical surfaces immediately after form removal.
- ◆ Avoid runs, puddles, and over-application.
- ◆ To achieve maximum curing performance, a second application should be made at right angles to the initial application. Second application can be applied as soon as the first application becomes tack-free.
- ◆ Application equipment should be cleaned with soap and water promptly following use.

## TECHNICAL DATA

	RES-CURE DH 100
<b>Color (Wet / Dry)</b>	Milky Brown / Amber
<b>Clarity</b>	Opaque
<b>Odor</b>	Pleasant
<b>VOC</b>	g / L <120
<b>VOC Classification</b>	Concrete Curing Compound Low Solids
<b>Bulk Density</b>	8.29 lbs. / gal. (994 g / L)
<b>Flash Point</b>	>105° F (>41° C)
<b>Freeze Point</b>	32° F (0° C)
<b>Dry (Dust Tack Free)</b>	30 minutes - 1 hour
<b>Dry (Light Traffic)</b>	12 hours
<b>Dry (Normal Traffic)</b>	24 hours
<b>Recoating Time</b>	1 hour

Complies with ASTM C 309, Type 1, Class A & B and AASHTO M 148, Type 1, Class B. Compliant with USDA requirements for incidental food contact.

## PACKAGING

Product is packaged in 5 gal (19 L) pails, 20 liter pails, 55 gal (208 L) drums and 200 liter drums.

## SHELF LIFE

Shelf life is 1 year. Use before the "USE BY" date stated on product packaging.

## HANDLING/STORAGE

Store in a dry location within a temperature range between 40° F (4° C) and 100° F (38° C).

## AVAILABILITY & TECHNICAL SERVICES

In addition to corporate offices in Omaha, Nebraska, Nox-Crete, Inc. maintains regional offices and distribution centers in principal markets throughout the world. For source or technical information, call 800-669-2738 or 402-341-2080.

## LIMITED WARRANTY

### NOTICE-READ CAREFULLY

#### CONDITIONS OF SALE

NOX-CRETE offers this product for sale subject to, and Buyer and all users are deemed to have accepted, the following conditions of sale and limited warranty which may only be varied by written agreement of a duly authorized corporate officer of NOX-CRETE. No other representative of or for NOX-CRETE is authorized to grant any warranty or to waive limitation of liability set forth below.

#### WARRANTY LIMITATION

NOX-CRETE warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, NOX-CRETE will replace the defective product with new product without charge to the purchaser.

NOX-CRETE makes NO OTHER WARRANTY, either express or implied, concerning this product. There is NO WARRANTY OF MERCHANTABILITY. In no case shall NOX-CRETE be liable for special, indirect or consequential damages resulting from the use or handling of the product and no claim of any kind shall be greater in amount than the purchase price of the product in respect of which damages are claimed.

#### INHERENT RISKS

NOX-CRETE MAKES NO WARRANTY WITH RESPECT TO THE PERFORMANCE OF THE PRODUCT AFTER IT IS APPLIED BY THE PURCHASER, AND PURCHASER ASSUMES ALL RISKS ASSOCIATED WITH THE USE OR APPLICATION OF THE PRODUCT.



chemical solutions to concrete problems

www.nox-crete.com

Updated 07/07/26. This version replaces all previous versions.

1444 S. 20th St. • P.O. Box 8102 • Omaha, Nebraska 68108 United States  
PHONE: (800) NOX-CRETE (669-2738) or (402) 341-2080